



湖南凯恩利液压 Hunan KEL Hydraulic

比例减压阀 KPPCD04-20-24-D-F
Proportional Pressure Reducing Valve


尺寸图
Dimension

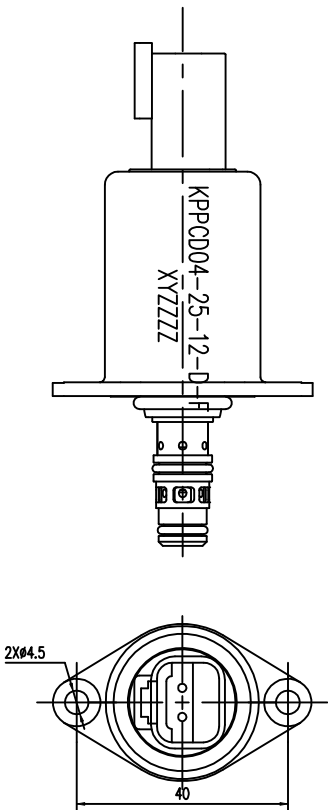

液压原理图
Hydraulic Diagram



压力曲线图
Pressure Characteristic Curve

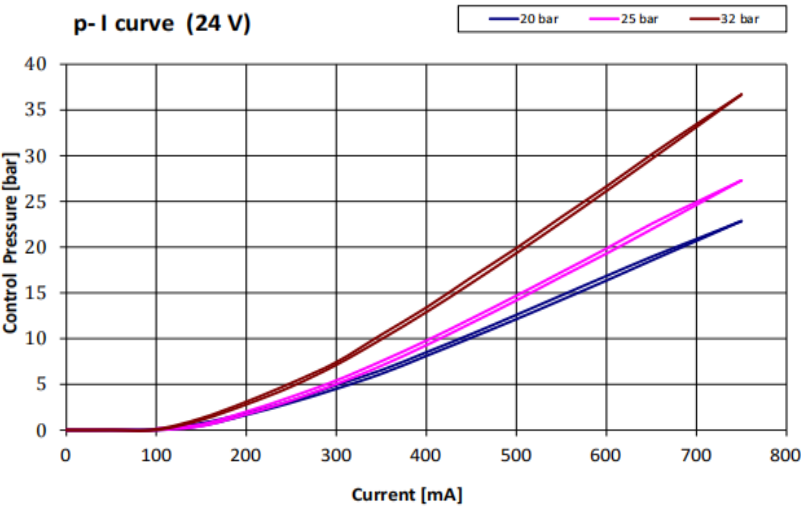

湖南凯恩利液压 Hunan KEL Hydraulic


比例减压阀 KPPCD04-20-24-D-F
Proportional Pressure Reducing Valve

技术参数TECHNICAL DATA

- | | |
|---------------------------------------|---|
| 1. 油口2最高压力: 50Bar
油口3最高压力: 30Bar | 1. Max. Port 2 Pressure: 50Bar
Max. Port 3 Pressure: 30Bar |
| 2. 额定流量: 5L/min | 2. Rated Flow: 5L/min |
| 3. 控制电流: 1400 mA 输出 25 bar | 3. Control current: 25 bar output at 1400 mA |
| 4. 比例阀电器接口: DT04-2P
防水性能等级: IP=69K | 4. Proportional valve electrical
connector: DT04-2P
Ingress Protection Rating: IP=69K |
| 5. 插孔: TC06025 | 5. Port: TC06025 |
| 6. 使用温度范围: -20℃-90℃ | 6. Operating temp: -20℃-90℃ |

孔型图


Hole Pattern Drawing

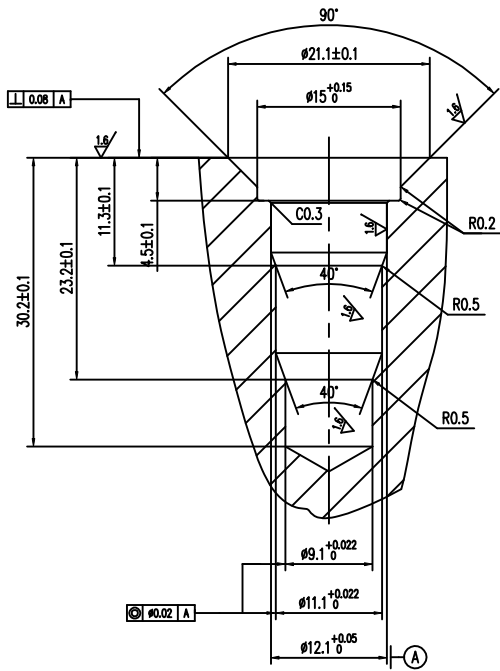

湖南凯恩利液压 Hunan KEL Hydraulic

比例减压阀 KPPCD04-20-24-D-F
Proportional Pressure Reducing Valve

订货代号 TO ORDER

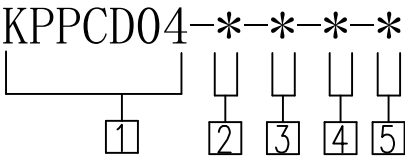

1 公司代号
KPPCD04= 比例减压阀
Proportional Pressure Reducing Valve

4 连接器Connector:
D=Deutsch
德驰插头 DT04-2P

2 控制压力范围Control pressure range
20输出压力20Bar
25输出压力25Bar
32输出压力32Bar

5 密封材料 Seal material
F= FKM氟素橡胶
N=丁腈橡胶

3 电压 Rated Voltage
12 =DC 12V
24 =DC 24V